

## Mini Converter HDMI to SDI 6G



Mini Converter HDMI to SDI 6G includes everything you need to convert from HDMI devices to SDI video in SD, HD and Ultra HD video formats. With independent audio connections you can also embed SDI audio from HDMI, AES/EBU or balanced analog audio inputs. Mini Converter HDMI to SDI 6G is the perfect solution to convert HDMI consumer cameras or computers to broadcast quality SDI!

### Connections

#### SDI Video Outputs

2 x SDI Video Outputs. Automatically matches the SD, HD and 6G-SDI HDMI video input.

#### HDMI Video Inputs

HDMI type A in

#### Analog Audio Inputs

2 channels of professional balanced analog audio with standard 1/4 inch jack connections.

#### Digital Audio Inputs

4 channels of AES/EBU digital audio.

#### Multi Rate Support


Auto detection of SD, HD or 6G-SDI.

#### Updates and Configuration

USB

#### Reclocking

Yes

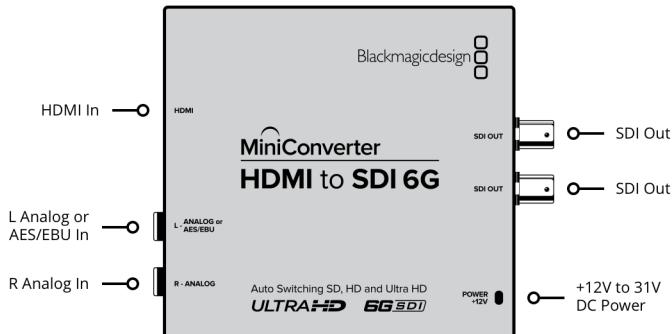

### Standards

#### SD Video Standards

625i25 PAL, 525i29.97 NTSC

<b>HD Video Standards</b>	<b>SDI Video Rates</b>	<b>HDMI Video Standards</b>
720p50, 720p59.94, 720p60, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60, 1080i50, 1080i59.94, 1080i60	SDI video connections are switchable between SD, HD, Ultra HD and DCI 4K.	625i25 PAL, 525i29.97 NTSC, 720p50, 720p59.94, 720p60, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60, 1080i50, 1080i59.94, 1080i60, 2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30
<b>Ultra HD Video Standards</b>	<b>SDI Video Sampling</b>	<b>HDMI Color Space</b>
2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30	4:2:2	YUV and RGB
<b>4K Video Standards</b>	<b>SDI Audio Sampling</b>	<b>HDMI Color Precision</b>
4K DCI 23.98p, 4K DCI 24p, 4K DCI 25p	Television standard sample rate of 48 kHz and 24 bit.	4:2:2 and 4:4:4
<b>SDI Compliance</b>	<b>SDI Color Precision</b>	<b>Copy Protection</b>
SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 372M, SMPTE 424M, SMPTE 425M Level A or Level B, SMPTE ST-2081, ITU-R BT.656 and ITU-R BT.601.	4:2:2	HDMI input is unable to capture from copy protected HDMI sources. Always confirm copyright ownership before capture or distribution of content.
	<b>SDI Color Space</b>	
	YUV	
	<b>SDI Auto Switching</b>	
	Automatically detects SD, HD or 6G-SDI.	

## Format Conversion

HD down conversion

## Software

### Software Control

Mac OS and Windows software  
upgrade via USB.

### Internal Software Upgrade

Via included updater application.

## Operating Systems



Mac 10.14 Mojave,  
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

## Settings Control

Mini Switches or USB software.

---

## Power Requirements

Power Supply	Power Consumption	Operational Voltage Range
+12V universal power supply included with international socket adapters for all countries. Cable tie point.	4.44 Watts	12 - 18V DC

---

## Physical Specifications



---

## Environmental Specifications

Operating Temperature	Storage Temperature	Relative Humidity
0° to 40° C (32° to 104° F)	-20° to 45° C (-4° to 113° F)	0% to 90% non-condensing

---

## What's Included

Mini Converter HDMI to SDI 6G  
12V universal power supply with international socket adapters

---

## Warranty

3 Year Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller